


BesTank[®]

International

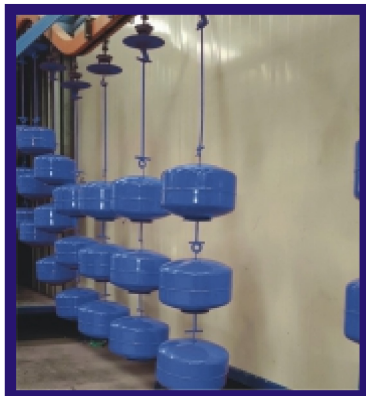

BESTANK INTERNATIONAL

贝斯特国际

Company: Ningbo Best Metal Products Co., Ltd

Oem Controls S.A.C
Teléfono 51 946566639
www.oemcontrols.com.pe
Lima - Perú





Changeable Mebrane Potable Water Pressure Tank Series

8 bar / 10 bar / 16 bar / 25 bar

Horizontal Tanks

Model 型号	L Capacity 容积	Bar Pressure 最大工作压力	D length 直径	H Height 高度	Pre. Charge Pressure 预充压力	Connection 接口
BHT-19H-PW	19 LT	8-10-16-25	310 mm	385 mm	2 bar	1" BSP / NPT
BHT-24H-PW	24 LT	8-10-16-25	340 mm	430 mm	2 bar	1" BSP / NPT
BHT-36H-PW	36 LT	8-10-16-25	400 mm	450 mm	2 bar	1" BSP / NPT
BHT-50H-PW	50 LT	8-10-16-25	400 mm	610 mm	2 bar	1" BSP / NPT
BHT-60H-PW	60 LT	8-10-16-25	440 mm	730 mm	2 bar	1" BSP / NPT
BHT-80H-PW	80 LT	8-10-16-25	520 mm	805 mm	2 bar	1" BSP / NPT
BHT-100H-PW	100 LT	8-10-16-25	550 mm	820 mm	4 bar	1" BSP / NPT

Vertical Tanks Without Leg / 立式无支架

Model 型号	L Capacity 容积	Bar Pressure 最大工作压力	D Diameter 直径	H Height 高度	Pre. Charge Pressure 预充压力	Connection 接口
BHT-2V-PW	2 LT	8-10-16-25	160 mm	270 mm	2 bar	3/4" BSP / NPT
BHT-5V-PW	5 LT	8-10-16-25	160 mm	315 mm	2 bar	3/4" BSP / NPT
BHT-8V-PW	8 LT	8-10-16-25	200 mm	370 mm	2 bar	3/4" BSP / NPT
BHT-12V-PW	12 LT	8-10-16-25	240 mm	380 mm	2 bar	3/4" BSP / NPT
BHT-19V-PW	19 LT	8-10-16-25	270 mm	385 mm	2 bar	1" BSP / NPT
BHT-24V-PW	24 LT	8-10-16-25	300 mm	430 mm	2 bar	1" BSP / NPT
BHT-240S-PW	24 LT	8-10-16-25	350 mm	325 mm	2 bar	1" BSP / NPT
BHT-36V-PW	36 LT	8-10-16-25	350 mm	450 mm	2 bar	1" BSP / NPT
BHT-50V-PW	50 LT	8-10-16-25	350 mm	610 mm	2 bar	1" BSP / NPT
BHT-60V-PW	60 LT	8-10-16-25	380 mm	650 mm	2 bar	1" BSP / NPT




Vertical Tanks With Leg / 立式含三脚支架

Model 型号	L Capacity 容积	Bar Pressure 最大工作压力	D Diameter 直径	H Height 高度	Pre. Charge Pressure 预充压力	Connection 接口
BHT-36VL-PW	36LT	8-10-16-25	350 mm	585 mm	2 bar	1" BSP / NPT
BHT-50VL-PW	50 LT	8-10-16-25	350 mm	760 mm	2 bar	1" BSP / NPT
BHT-60VL-PW	60 LT	8-10-16-25	380 mm	870 mm	2 bar	1" BSP / NPT
BHT-80VL-PW	80 LT	8-10-16-25	425 mm	930 mm	2 bar	1" BSP / NPT
BHT-100VL-PW	100 LT	8-10-16-25	460 mm	990 mm	4 bar	1" BSP / NPT
BHT-150VL-PW	150 LT	8-10-16-25	500 mm	1090 mm	4 bar	1" BSP / NPT
BHT-200VL-PW	200 LT	8-10-16-25	600 mm	11120 mm	4 bar	1-1/4" BSP / NPT
BHT-300VL-PW	300 LT	8-10-16-25	640 mm	1250 mm	4 bar	1-1/4" BSP / NPT
BHT-500VL-PW	500 LT	8-10-16-25	750 mm	1490 mm	4 bar	1-1/4" BSP / NPT
BHT-750VL-PW	750 LT	8-10-16-25	800 mm	1920 mm	4 bar	2" BSP / NPT
BHT-850VL-PW	850 LT	8-10-16-25	800 mm	2020 mm	4 bar	2" BSP / NPT
BHT-1000VL-PW	1000 LT	8-10-16-25	800 mm	2280 mm	4 bar	2" BSP / NPT
EDS-1500VL-PW	1500 LT	8-10-16-25	960 mm	2350 mm	4 bar	2" BSP / NPT
BHT-2000VL-PW	2000 LT	8-10-16-25	1100 mm	2450 mm	4 bar	2" BSP / NPT
BHT-2500VL-PW	2500 LT	8-10-16-25	1200 mm	2500 mm	4 bar	3" BSP / NPT
BHT-3000VL-PW	3000 LT	8-10-16-25	1350 mm	2600 mm	4 bar	3" BSP / NPT
BHT-4000VL-PW	4000 LT	8-10-16-25	1450 mm	3100 mm	4 bar	3" BSP / NPT
BHT-5000VL-PW	5000 LT	8-10-16-25	1500 mm	3670 mm	4 bar	3" BSP / NPT
BHT-6000VL-PW	6000 LT	8-10-16-25	1500 mm	4050 mm	4 bar	3" BSP / NPT
BHT-8000VL-PW	8000 LT	8-10-16-25	1600 mm	4760 mm	4 bar	3" BSP / NPT
BHT-10000VL-PW	10000 LT	8-10-16-25	1600 mm	5900 mm	4 bar	3" BSP / NPT



COLOUR

Original	RAL 5015
Optional	RAL 6016
Optional	RAL 1013
Optional	RAL 3020

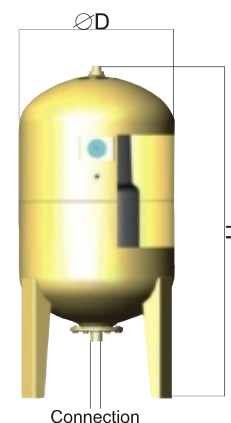

SUPERIOR QUALITY

BesTank®

International



Horizontal Tanks



Vertical Tanks Without Leg 立式无支架



Vertical Tanks With Leg 立式含三脚支架

SPECIFICATIONS

Tank Metal Body

- Changeable membrane with a screw connection flange cover
- Flange connection made of stainless steel or galvanized material
- Resistant up to 8/10/16/25 bars
- Outer surface with Epoxy powder paint

Membranes

- High quality EPDM membranes, hygienic certified, approved by European Union and USA Institutions
- DIN 4807-3, NSF-61, WRAS, BS-6920 certified and other quality certificates available

Option: Butly membranes available upon request


Colour;

Original Colour; Blue - RAL 5015

BESTANK



RAL5015

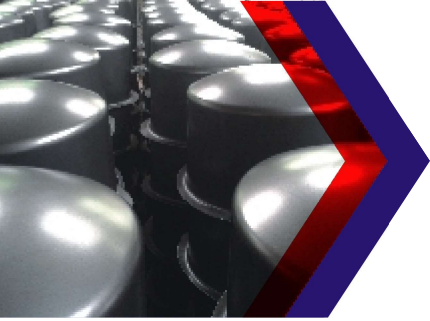

Changeable Mebrane Potable Water Pressure Tank Series



BESTANK



Fresh-hygienic water is the most important need of the humans today . We have to bring the water to our houses with the city network line in a way that the water does not damages its hygienic features. For this reason, in the buildings, factories and other places where hydrophore systems are used, it is obligatory that the membrane inside the hydrophore tank strictly correspond to hygienic standarts.

Bestank potable water tank series provide a high hygienic standarts to its users. The membrane used inside the Bestank Tanks corresponds to all European Union and USA potable water hygienic standarts and all the membranes are made in italy completely. Futhermore, the only point where the water touches the tank, inlet-outlet, is the flange cover and connector which are made of stainless steel or electro galvanized.

Bestank hydrophore tanks are available in 8 bar- 10 bar-16 bar and 25 bar which can be used in combined with irrigating pumps, centrifugal pumps and other hydrophore systems in a safe way....



Accessories

BESTANK offers high quality EPDM / Butly Membrane as accessories

BESTANK提供高质量EPDM和丁基胶气囊等配件





BesTank[®]

International



Changeable Membrane
Potable Water
Pressure Tank Series

8/10/16/25 Bar
2 lt - 10.000 lt

供水系列

With Italian
Membrane
配置意大利
进口内胆

